



DNH

HEAD OFFICE, NORWAY
DNH AS

Phone..... + 47 35 98 56 00
Fax..... + 47 35 98 56 10
E-mail..... dnh@dnh.no
Web-Site..... www.dnh.no

ENGLAND

DNH WW Ltd

Phone..... + 44 1908 275 000
Fax..... + 44 1908 275 100
E-mail..... dnh@dnh.co.uk

GERMANY

DNH GmbH

Phone... + 49 040 6569 30-0
Fax..... + 49 040 6569 30-30
E-mail..... dnh@dnh.de

USA

DNH Speakers Inc

Phone..... + 1 484 494 5790
Fax..... + 1 484 494 5793
E-mail..... dnh@dnhspeakers.com

BPF-660-54(T)8W

ISO 9001 CERTIFIED



Tested acc. To EN54-24:2008

Type: A

Manufactured by DNH A/S

Kragerø, Norway


21 1438-CPR-0771

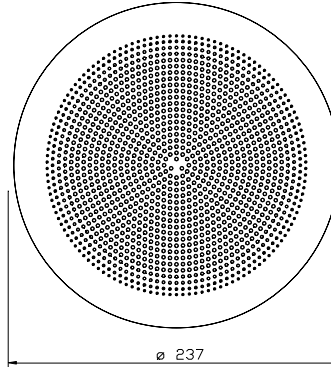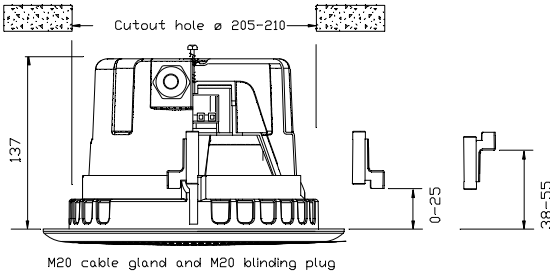

100 volt transformer Primary connections		
White	: Red	100 V
Secondary nominal tapings		
1 : 4	8,0 W	Imp 1250 Ω
1 : 3	4,0 W	Imp 2500 Ω
2 : 4	3,0 W	Imp 3333 Ω
1 : 2	2,0 W	Imp 5000 Ω
3 : 4	1,5 W	Imp 6666 Ω
2 : 3	0,8 W	Imp 9000 Ω

Sound pressure levels at 1W/1m P-6/15B

SPL vs Freq

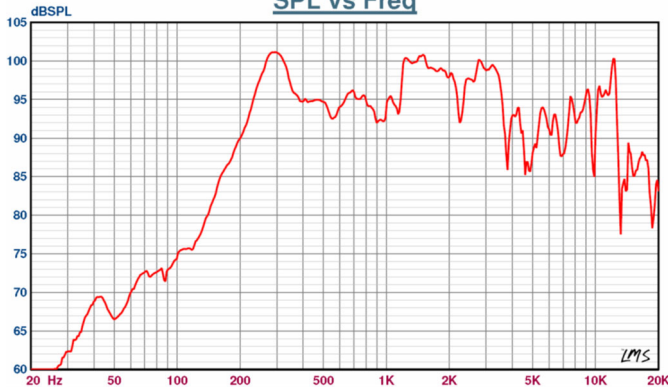

Coverage angles (±6dB)

1 Oct. Pink noise	500Hz	180°
1 Oct. Pink noise	1KHz	175°
1 Oct. Pink noise	2KHz	150°
1 Oct. Pink noise	4KHz	65°

Specifications acc. testing CNBOP / DNH

Material / Color	PA-6 V0/ ABS / RAL9010
Mounting	Hooks
Termination	Spring clamps
Weight w/transformer	1,3 kg
IP-rating	21C / 54
Working temp	55°C to -10°C / 90°C to -20°C
Rated power	8W
Sensitivity 1W/4m	79 dB
SPL 8W/4m	88 dB
Freq. range	170 – 20000 Hz
Measurement environment	Free-field

Maximum SPL at 8W/4M are the SPL values at 1W/4M increased with 9dB for every 1/3 octave pink noise level.

Installation, Operation and Maintenance Procedures

- Install the ring into the cutout hole turning the crews connected to the three hooks, screw clockwise until the ring is fixed to the ceiling.
- Open box by one screw, lead cable through cable gland, connect to terminal and select required tapping on transformer.
- Screw box back into place with one screw.
- Turn the grill gently clockwise within the ring until it stops.
- Hooks can be mounted both ways, see drawing at top of the page.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice.

