



# DNH

HEAD OFFICE, NORWAY

**DNH AS**

Phone..... + 47 35 98 56 00

Fax..... + 47 35 98 56 10

E-mail..... dnh@dnh.no

Web-Site..... www.dnh.no

ENGLAND

**DNH WW Ltd**

Phone..... + 44 1908 275 000

Fax..... + 44 1908 275 100

E-mail..... dnh@dnh.co.uk

GERMANY

**DNH GmbH**

Phone... + 49 040 6569 30-0

Fax..... + 49 040 6569 30-30

E-mail..... dnh@dnh.de

USA

**DNH Speakers Inc**



Phone..... + 1 484 494 5790

Fax..... + 1 484 494 5793


E-mail..... dnh@dnhspeakers.com

## MD-40(T)

ISO 9001 CERTIFIED

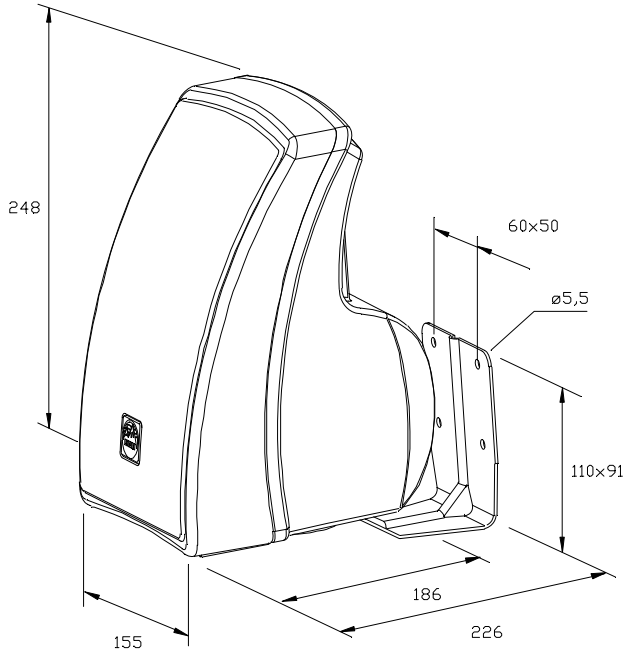


Optional DP bracket plastic



Standard bracket


MD-40 is delivered with standard bracket, backlid, cable glands and screws.  
Kabel dia 4-7,5mm - PG7.

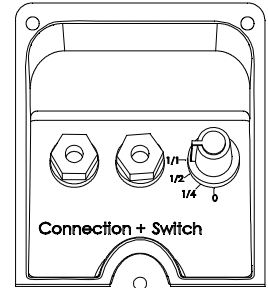

Secondary switch tappings	
1 / 1	40,0 W
1 / 2	20,0 W
1 / 4	10,0 W

### Sound pressure levels at 1W/1m

#### SPL vs Freq

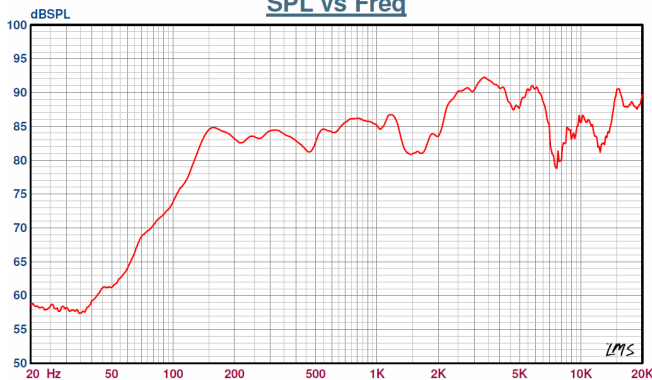

### Specifications

Material / Color	ABS / Black or white
Mounting	Bracket
Termination	Screw terminal
Weight w/transformer	3,1 kg
IP-rating	44*
Max. / min. amb. temp	90°C / -40°C
Rated power	40W
SPL 1W/1m	87 dB
SPL rated power	103 dB
Effective freq. range	70 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	170° / 70°(Vertical)
Options	Impedances, colors, labels

### Installation, Operation and Maintenance Procedures

- MD-40 is available with 40W transformer, and optional brackets are available on request.
  - Screw bracket to wall or ceiling, place cabinet onto ball socket and tighten bolt.
  - Connect to screw terminal and select required volume with the switch.
  - Screw on lid with gasket and tighten cable glands to assure a good sealing towards cable.
  - For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
  - Do not open loudspeaker when energized.
  - This loudspeaker is supplied with two years warranty against defective workmanship.
- \* To achieve IP the loudspeaker should be mounted with the grill 30 degrees downwards.

DNH reserves the right to alter specifications without notice.

