



DNH

HEAD OFFICE, NORWAY

DNH AS

Phone..... + 47 35 98 56 00

E-mail..... dnh@dnh.no

Web-Site..... www.dnh.no

ENGLAND

DNH WW Ltd

Phone..... + 44 1908 275 000

Fax..... + 44 1908 275 100

E-mail..... dnh@dnh.co.uk

GERMANY

DNH GmbH

Phone... + 49 040 6569 30-0

Fax..... + 49 040 6569 30-30

E-mail..... dnh@dnh.de

USA

DNH Speakers Inc


Phone..... + 1 484 494 5790

Fax..... + 1 484 494 5793

E-mail..... dnh@dnhspeakers.com


ISO 9001 CERTIFIED

CP-4(T)

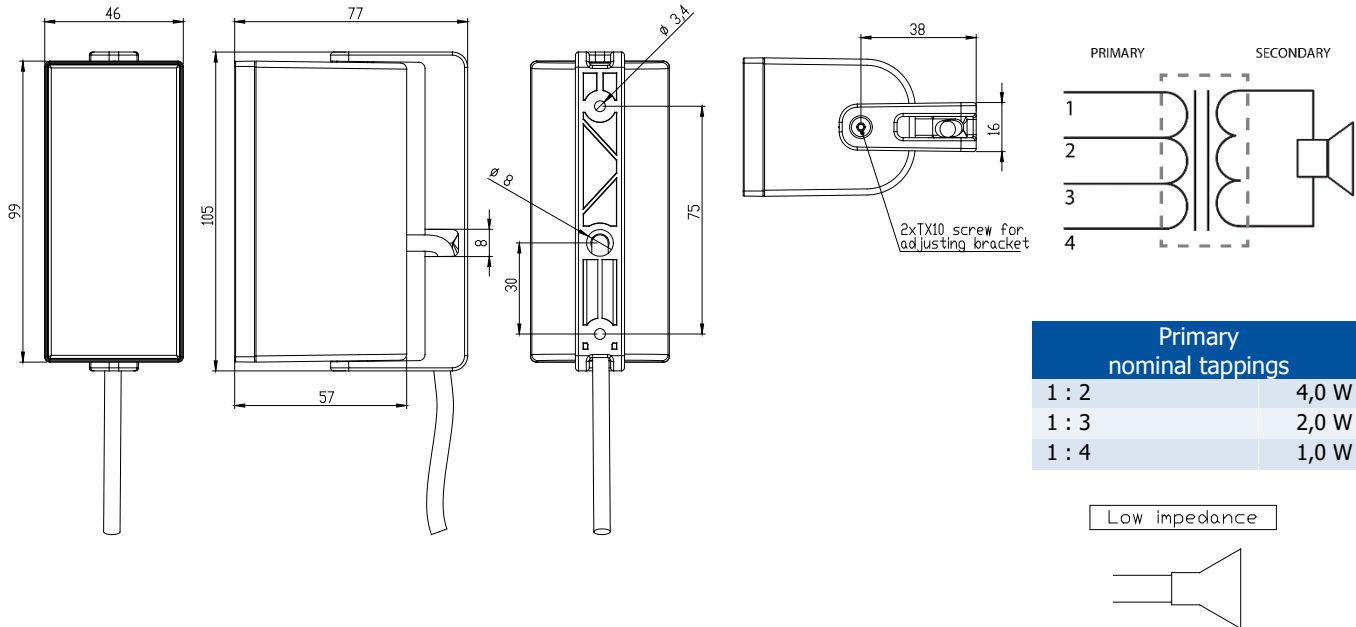

Sound pressure levels at 1W/1m

SPL vs Freq

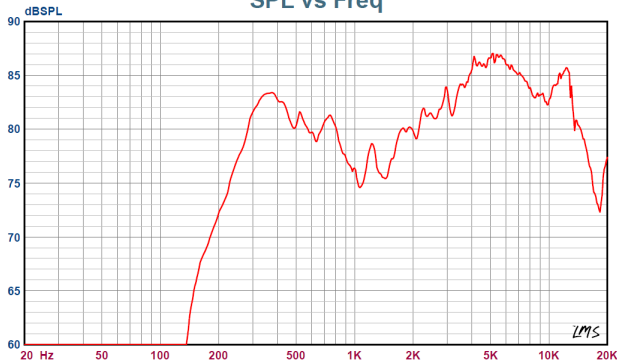

Specifications

Material / Color	Plastic / Black
Mounting	Bracket
Termination	Cable
Weight w/transformer	0,22 kg
IP-rating	55
Max. / min. amb. temp	90°C / -20°C
Rated power	4 W
SPL 1W/1m	80 dB
SPL rated power	85 dB
Effective freq. range	180 – 20000 Hz

Installation, Operation and Maintenance Procedures

- Fasten loudspeaker with two screws through foot bracket.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice.

